



1 Turn ON/OFF

- Power-on, wait for the blue indicator light off;
- Slide the lens cap to turn on the device;
- Close the lens cap to turn off the device.

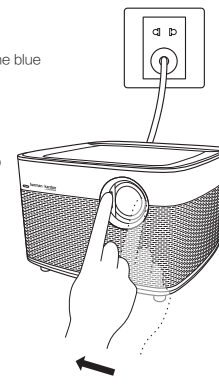


2 Remote Control Pairing



- For the first time to use, please charge the remote control for half an hour.
- Please place remote control within 10cm from the device, and press "Q" and "D" at the same time, when the indicator light of remote control flashes, release the buttons, and the indicator light flashes continuously, after hearing "ding" sound, connection successful.
- If pairing failed, exits the pairing mode after 30 seconds timeout, follow the steps above to pair again.

3 Focusing Function

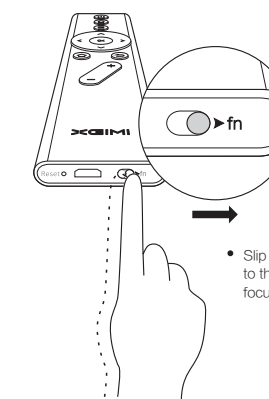


- Slip the Function Key(fn) to the right to enable the focusing function;

- Slip the Function key of remote control to the right to enable the focusing function, and press "Volume+/-" key to adjust the focus.

4 Charge Remote Control

When the red indicator appears and blinks, please charge the remote control.

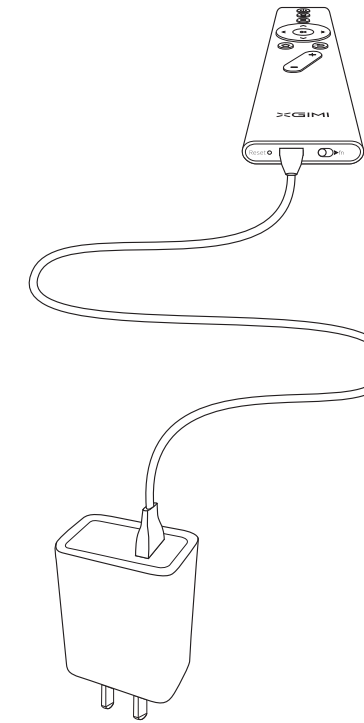


5 Function Description of Remote Control

- Focusing Function**
Slide the Function Key (fn) at the bottom of the remote control to right to enable the focusing function; at the moment, "Volume+/-" key has the focusing function; slide the Function Key to left to close the focusing function; at the moment, "Volume+/-" key has the volume adjustment function; when the focusing function is enabled, the blue indicator light keeps on;
- Air Mouse Function**
Vigorously shake the remote control to turn on/off the air mouse function;
- Menu Function**
Click "Menu key" to enable the Menu function or press down and hold "Menu key" to enable the shortcut function;
- State of Charge**
Upon charging, the red indicator light keeps on; after the end of charging, the green indicator light keeps on; when there is a low battery prompt, the red indicator light flashes four times; when serious power shortage, after the red indicator light quickly flashes 10 times, the remote control shuts down and must be charged before use.
- Standby and Sleep State**
In working mode, if the remote control is standby for 10 seconds, it will enter the sleep state; in this state, you can press any key to wake it up;
- Reset Function**
When there is no response of the remote control, poke Reset key at the bottom of remote control, the red indicator light will flash three times, and then reset is done.

6 Adjustment of Picture Size (Optical Zoom)

Insert the needle into the focusing hole on the edge of the lens and turn the lens clockwise/anticlockwise to adjust the picture size.

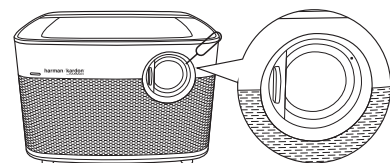


7 XGIMI Assistance

Scan the QR code to download XGIMI assistant

- mobile phone remote: device can be easily controlled by mobile phone.
- mobile phone resource: send the resource from mobile phone to device to view photos or videos.
- mirroring display control: mirroring to mobile phone, support gravity sensor games.



8 Sound Mode

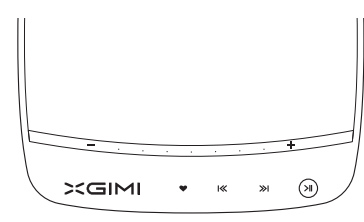


Left/right sliding area Adjusting the volume

Add/Delete Previous Next Pause/Play
Favorite (unavailable for overseas market)

Bluetooth Sound Mode



It can directly match the mobile phone for the first use. Press the Play key on the body to match other equipment again.

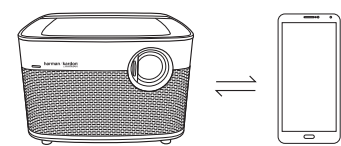


* The device can communicate with the mobile phone or other remote control devices only in Bluetooth sound mode.

Exiting Bluetooth Sound Mode

When the lens cap closed


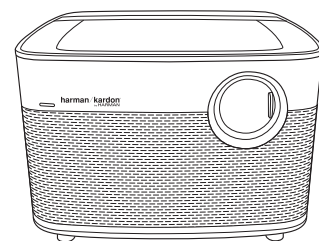


- Press "Q" key on the remote control to turn off the machine;

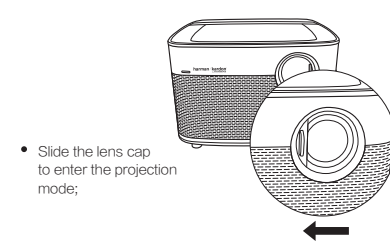


- Slide the lens cap to enter the projection mode;

When the lens cap opened

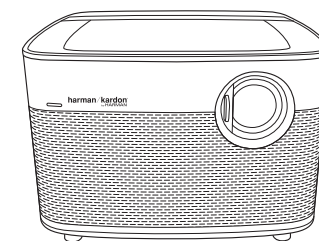

- Press "Q" key on the remote control to enter the projection mode;

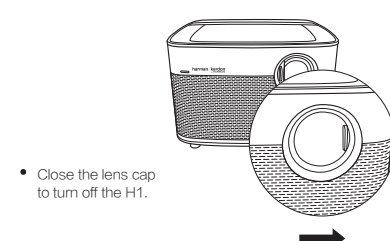

- Close the lens cap to turn off the H1.

Product specification		
Product classification	Home Projector	
Display technique	0.47" DMD RGB-LED	
Lens	High light transmission coated lens	
Specialty	3D	
Luminance	900ANSI Lumens	
Luminance uniformity	98%	
Color gamut	3*120%NTSC	
Contrast	10000:1	
Standard resolution	Full HD (1920X1080)	
Compatible resolution	2K/4K	
Projection ratio	1.39~1.5:1	
Keystone correction	Vertical: ±35 degree, horizontal: ±30 degree	
Projection method	Forward/backward/ hang ceiling	
Partial axis	100%	
Optical zoom	1.1 times	
CPU	Mstar SA928 Cortex-A17	
GPU	Mali-T760MP4	
RAM	3GB DDR3	
Storage	16GB eMMC	
System	Android 5.1.1	
Mirroring display	Airplay/DLNA/Miracast	
Speaker Unit	45mm*2	
Sound power	7.5w*2	
Sound channel	2.0+ Bass diaphragm	
Ports	Input ports	HDMI 2.0x2 USB 2.0x1 USB 3.0x1
	Output port	HeadPhone/SPDIFx1 HDMI ARCx1
	Wired network port	LANx1
Electrical parameters	WiFi	Dual-band 2.4G/5G, 802.11a/b/g/n/ac 2x2 double antennas
	Bluetooth	Bluetooth 4.0/BLE
	Noise	<30dB
Other parameters	Power dissipation	80~130W
	Power	AC100~240V, 50/60Hz
	Rated	17W*7.1A
Size	Size	245*245*216mm
	Height	2.1kg
	The maximum operating temperature	40°C

Packing list	
Power cable	x1
Bluetooth remote-control	x1
Remote-control charge cable	x1
Zoom dial	x1
Warranty card	x1
Power Adapter	x1
Changeover Plug	x1

H1
User Guide

XGIMI™